



## SPECIFICATIONS:

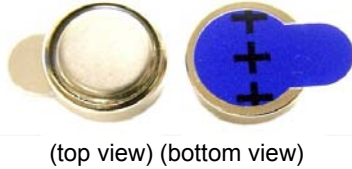


## Industry Standard Dimensions

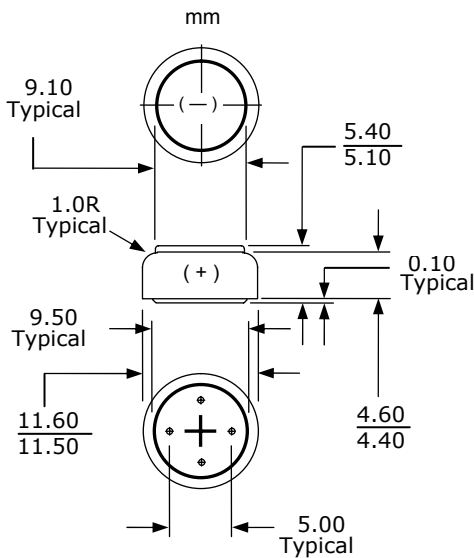


<b>Chemical System:</b>	Zinc Air (Zn/O <sub>2</sub> )
<b>Identification:</b>	IEC-PR44
<b>Tab Color:</b>	Blue
<b>Build Standard:</b>	IEC 60086-1:2000, IEC 60086-2:2000
<b>Nominal Voltage:</b>	1.4 Volts
<b>Capacity:</b>	630 mAh (to 0.9 volts) (Rated at 620 ohms at 20°C/ 60%RH)
<b>Available Current:</b>	20 mA(at 1.1 volts)
<b>Tab Sealing Arrangements:</b>	On Cathode Can. See picture above.
<b>Capacity Retention:</b>	> 85%(after 3 years)
<b>Shelf Life:</b>	3 years
<b>Operation Temp:</b>	0°C to 50°C
<b>Typical Weight:</b>	1.57 grams (0.06 oz.)
<b>Typical Volume:</b>	0.56 cubic centimeters (0.034 cubic inch)
<b>Impedance:</b>	≤ 2 ohms (at AC 1000Hz)

**DISCHARGE CHARACTERISTICS AT 620Ω 20°C 60%RH**  
(Discharged 24 hours/day)

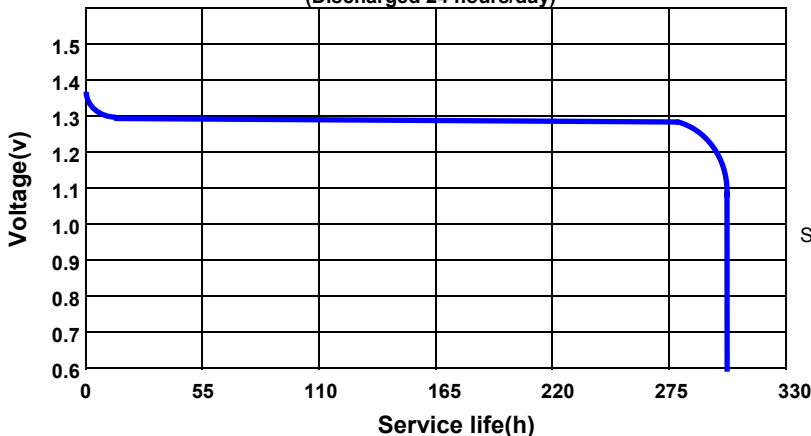

## Construction

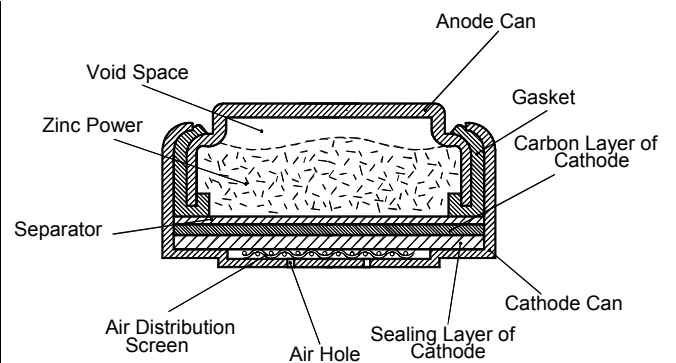

This data sheet is subject to change without prior notice. Contact us for the latest information. Contents here do not constitute a warranty. May, 2009